

pressure-control-valve type MD02



description:

Pressure-control-valve for pressure air and neutral gaseous media to control pressure supply in a pipeline system. Pressure-control-valve back controllable (secondary ventilation).

product features:

- suitable for neutral gaseous media, oiled and non-oiled pressure air
- pressure-control-valve back controllable (secondary ventilation)
- lockable handwheel

connection:

G 3/8", G 1/2"

temperature:

0°C up to +50°C

pressure:

pressure entry max. 16 bar

design:

body material:

seals:

diaphragm:

primary pressure:



range of adjustment:

media:


manometer:

pressure-control-valve with diaphragm and secondary ventilation
 plastic PA66
 NBR
 NBR
 up to 16,0 bar
 0,5 – 8,0 bar
 non-oiled and oiled pressure air, neutral gaseous media
 external manometer included in delivery

dimensions G 1/2":

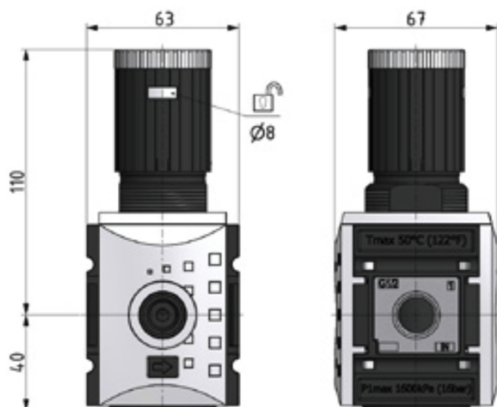


flow rate:

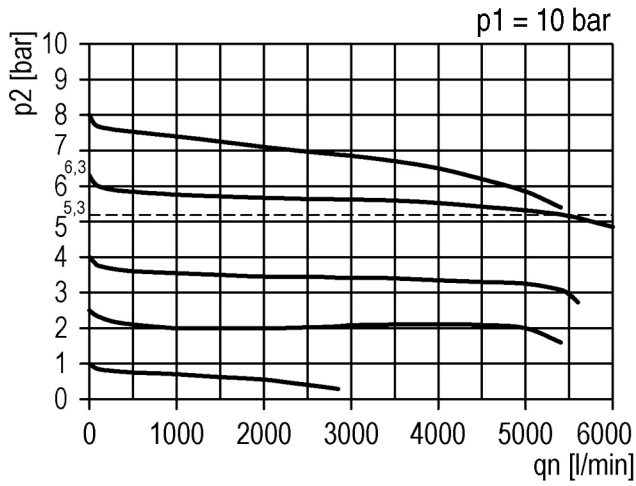

dimensions 3/8":



flow rate:

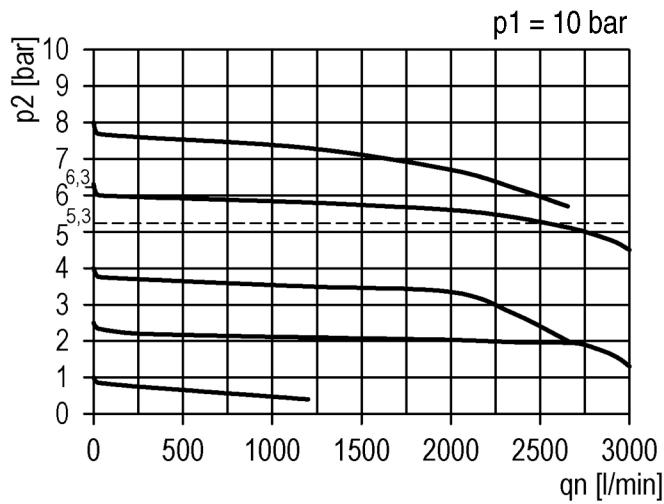

article number:

Type	range of adjustment	Seal	diameter
MD02	00 – 0,5 - 8,0 Bar	00 – NBR	02 – G 3/8" 03 – G 1/2"

pressure-control-valve with diaphragm and secondary ventilation made of plastic

primary pressure max. 16 bar

seal: NBR

diameter: G 3/8"

Image similar, subject change without notice.