

# Sight glass fitting TYPE BS01



**description:**

Sight flow indicators are used for observation and to illuminate optical control of fluids and gases. E.g. tanks, silos, boilers...

**features:**

- suitable for neutral and non-neutral **liquids and gaseous media.**
- with borosilicate glass DIN 7080
- Delivery includes: Base- & cover flange, glass & sealing

**Connection:**

DN50, DN80, DN100, DN125, DN150, DN200

**Design:**

acc. similar DIN 28120

**Pressure:**

2,5 bar

**Design:**

**Material base-flange:**

to be welded directly to tank

**Material cover-flange:**

stainless steel 1.4541

**Seal:**

stainless steel 1.4541

**Glass:**

C4400

**Screws:**

borosilicate glass DIN 7080

**Temperature:**

A4-70


**Delivery includes:**

0°C to +150°C

Base- & cover flange, glass & sealing

**Dimensions:**

DN	Di	Da	h1	Weight kg
50	80	150	12	3,8
80	100	175	14	5,2
100	125	200	14	6,1
125	150	220	16	7,2
150	175	250	16	8,9
200	225	300	16	11,5

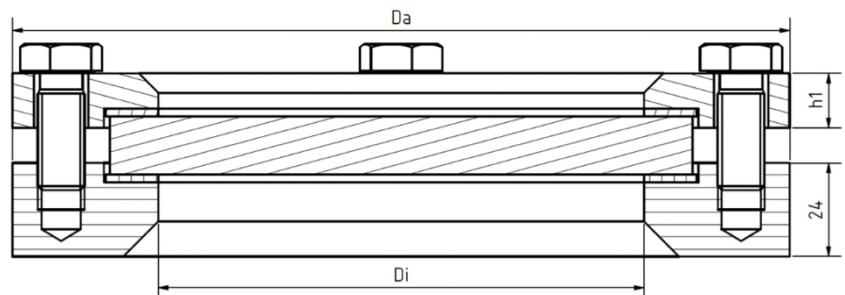

## Article number:

Type	Glass	Version	Size
<b>BS01</b>	<b>00 – borosilicate glass</b>	<b>00 – Standard</b>	08 – DN50 <b>10 – DN80</b> 11 – DN100 12 – DN125 13 – DN150 14 – DN200

### Example no. BS01000010:

<b>BS01</b>	<b>00</b>	<b>00</b>	<b>10</b>
-------------	-----------	-----------	-----------

Article no. BS01000010

Sight glass fitting

Glass: borosilicate glass

Size: DN80

Image similar, subject change without notice.